



Distinctive  
by design.

b2

### A reliable classic

The appeal of the B2 lies in its outstanding reliability and uncomplicated design. Enjoy straightforward refreshment with no fuss.

---

#### Reasons to choose

- Simple to use and easy to maintain
- Robust build construction



---

Distinctive  
by design.

Water systems



Reservoir



Direct Chill



Countertop



Floorstanding

Configurations

Water options



Chilled



Ambient



Hot

Available colours



Silver



White



Black



Distinctive  
by design.

## Totality™



Driven by a relentless pursuit of excellence, Totality™ is a research and development methodology for the advancement of hygiene, innovation and technology in refreshment systems.



### Biofilm, limescale and impact resistant epoxy resin panel finish

Providing an increased level of hygiene and longevity, Fynil™ is a scratch and impact resistant epoxy-resin surface finish - effectively resisting biofilm development and limescale cohesion.



### World-class filtration

For the ultimate drinking experience, appliances can be pre-fitted with a 3M filter to reduce sediment, chlorine, odours and scale.



### Laboratory certified 99.999% bacteria-free

Every appliance undergoes an anti-microbial, antipathogen, sanitising procedure. The reassurance of hygienically safe appliances is provided by the unique bacteria-eliminating process, Sterizen™.




### Ultra-violet sterilising system

For added hygiene confidence, appliances can be fitted with Viovand™ – an ultra-violet sterilisation process that reduces water-born bacteria.

Distinctive  
by design.

B2 models	Countertop W325xD380xH475mm	Water system	Dispense height	Max power consumption	Silver	White	Black
<b>Power requirements</b> Hertz 50/Volts 220-240	Chilled & Ambient	Reservoir	185mm	100W	105110	105111	105112
<b>Chilled temperature</b> Chilled & Ambient Min 4°C/Max 11°C	Chilled & Hot	Reservoir	185mm	545W	106110	106111	106112
<b>Direct Chill</b> Min 2°C/Max 11°C	Chilled & Ambient	Direct Chill	185mm	100W	107110	107111	107112
<b>Hot temperature</b> Max 90°C	<b>Floorstanding</b> W325xD380xH1060mm	Water system	Dispense height	Max power consumption	Silver	White	Black
<b>Throughput litres per hour</b> Chilled 25/Hot 6	Chilled & Ambient	Reservoir	185mm	100W	105810	105811	105812
	Chilled & Hot	Reservoir	185mm	545W	106810	106811	106812
	Chilled & Ambient	Direct Chill	185mm	100W	107810	107811	107812
	Chilled & Hot	Direct Chill	185mm	545W	107610	107611	107612

Direct Chill utilises innovative technology to chill water instantly, ideal for demanding environments.

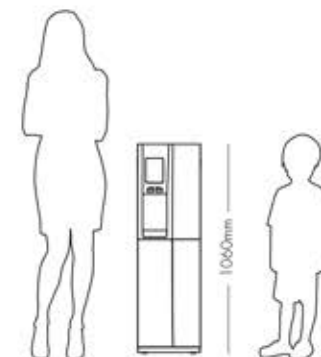

Distinctive  
by design.

b2

Additions for B2



**Printed paper cups**  
Environmentally-friendly disposable cups designed to fit dispensers perfectly.



**Cup dispenser**  
Convenient and practical, these cup dispensers complement our range of water cooler systems.



**Sanitisation kit**  
Six monthly sanitising cycles ensure appliances function at the optimum hygiene levels.



**Waste kit overflow sensor**  
Featuring an audible high-water level alarm to prevent the waste tank from overflowing.



**Leak detection kit**  
Featuring a moisture sensor that shuts the water supply in the unlikely event of a leak.



**Install kit with 3M filter**  
Install appliances simply and effectively in a wide range of applications. Complete with a 3M filter.



**Ultra-violet filter kit**  
Complete Viovandit™ filter kit to assist in water purification and removal of unwanted micro-organisms.



**Bottle conversion kit**  
For converting a B2 POU water dispenser into a bottle-fed water dispenser.



**Wall bracket kit**  
For added security, use the wall bracket set to anchor your watercooler back to the wall. Simple to fit and unobtrusive.



**Rear cover kit**  
Tamper-proof rear cover anchors the appliance to the wall and protects plumbing and electrical connections. Ideal for public areas.

Distinctive  
by design.





Contact us for further information  
on sales and service packages:

+44 28 2589 0000  
[sales@glacierwatersystems.com](mailto:sales@glacierwatersystems.com)  
[glacierwatersystems.com](http://glacierwatersystems.com)