



Distinctive
by design.

b3

First choice for education and healthcare

Built at an ideal height for both adults and children the B3 also features an ultra-hygienic touch-sensitive control panel, the biggest dispense area in its class for bottles and a tamper-proof rear cover guard for safety.

Reasons to choose

- Ultra-hygienic touch sensitive control panel
- High-capacity dispense area for bottles and jugs
- Integrated cup dispenser
- Sealed, hygienic, direct-chill cooling system
- Sparkling water option



Distinctive
by design.

b3

Water system



Direct Chill

Configurations



Countertop



Floorstanding

Water options



Chilled



Ambient



Hot



Sparkling

Available colours



Silver



White



Black



Distinctive
by design.

Totality™



Driven by a relentless pursuit of excellence, Totality™ is a research and development methodology for the advancement of hygiene, innovation and technology in refreshment systems.



Biofilm, limescale and impact resistant epoxy resin panel finish

Providing an increased level of hygiene and longevity, Fynil™ is a scratch and impact resistant epoxy-resin surface finish - effectively resisting biofilm development and limescale cohesion.



World-class filtration

For the ultimate drinking experience, appliances can be pre-fitted with a 3M filter to reduce sediment, chlorine, odours and scale.



Laboratory certified 99.999% bacteria-free

Every appliance undergoes an anti-microbial, antipathogen, sanitising procedure. The reassurance of hygienically safe appliances is provided by the unique bacteria-eliminating process, Sterizen™.



Ultra-violet sterilising system

For added hygiene confidence, appliances can be fitted with Viovand™ – an ultra-violet sterilisation process that reduces water-born bacteria.


Distinctive
by design.

b3

B3 models

	Countertop W325xD380xH475mm	Water system	Dispense height	Max power consumption	Silver	White	Black
Power requirements Hertz 50/Volts 220-240	Chilled & Ambient	Direct Chill	265mm	100W	104001	104002	104003
Chilled temperature Min 2°C/Max 11°C	Chilled, Hot & Ambient	Direct Chill	265mm	550W	104011	104012	104013
Hot temperature Max 92°C	Floorstanding W325xD380xH1106.5mm	Water system	Dispense height	Max power consumption	Silver	White	Black
Throughput litres per hour Chilled & Sparkling 30/Hot 6	Chilled & Ambient	Direct Chill	265mm	100W	104021	104022	104023
	Chilled, Hot & Ambient	Direct Chill	265mm	550W	104031	104032	104033
	Chilled, Ambient & Sparkling	Direct Chill	265mm	140W	104051	104052	104053
	Chilled, Hot & Sparkling	Direct Chill	265mm	640W	104041	104042	104043

Distinctive
by design.

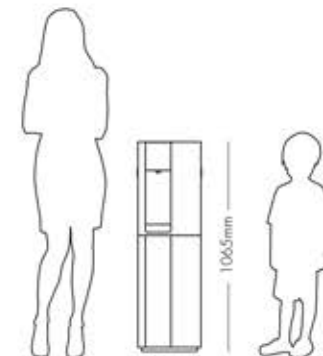

b3

Additions for B3



Cup dispenser blanking panel
Replacement top panel for situations where an integral cup dispenser is not required.

Printed paper cups
Environmentally-friendly disposable cups designed to fit dispensers perfectly.



Deep Sparkle™ CO² refills
Can be disposed via standard steel recycling or general waste. Requires CO² regulator with gauge.



Sanitisation kit
Six monthly sanitising cycles ensure appliances function at the optimum hygiene levels.



Waste kit overflow sensor
Featuring an audible high-water level alarm to prevent the waste tank from overflowing. Included as standard on floorstanding models.



Leak detection kit
Featuring a moisture sensor that shuts the water supply in the unlikely event of a leak.



Install kit with 3M filter
Install appliances simply and effectively in a wide range of applications. Complete with a 3M filter.



Ultra-violet filter kit
Complete Viovandi™ filter kit to assist in water purification and removal of unwanted micro-organisms.



Wall bracket kit
For added security, use the wall bracket set to anchor your watercooler back to the wall. Simple to fit and unobtrusive.



Rear cover kit
Tamper-proof rear cover anchors the appliance to the wall and protects plumbing and electrical connections. Ideal for public areas.

Distinctive
by design.



Contact us for further information
on sales and service packages:

+44 28 2589 0000
sales@glacierwatersystems.com
glacierwatersystems.com